



BUILDING TRUST



## PRODUCT DATA SHEET

# BEJS System

### Watertight Joint System for Bridges and Roads



BEJS SYSTEM sample shown here is displayed in substrate mock-up

### Product Description

The **BEJS System** from Sika Emseal, Bridge Expansion Joint System, builds on a track record of over 30 years of sealing horizontal plane joints with pre-compressed foam sealants.

The System is comprised of a precompressed, silicone-and-foam hybrid installed into field-applied epoxy adhesive on the joint faces; with the silicone bellows locked to the joint faces with a silicone sealant band (see Fig. 1).

The **BEJS System** features an innovation in sealant technology in the form of a microsphere-modified, 100% acrylic impregnation infused into the cellular foam base material.

The material is odorless, clean handling, UV stable, non-staining, and features low temperature flexibility not previously available in asphalt, wax, or isobutylene-based predecessors or competitors.

The result is extension of the usability of the product to applications where asphalt and wax-based predecessors did not work well under conditions of thermal shock (rapid opening and closing of joints during large temperature swings). These applications include joint-face adhered installations on bridge decks, wing walls, abutments, jersey barriers, precast panels, etc.

Suitability is further extended to applications in colder geographical regions to which asphalt and wax-based predecessors have not previously been recommended.

### Uses

- Watertight, traffic durable, joint-face-adhered, precompressed, **primary seal** for retrofit and new expansion joints in road bridges, wing walls, abutments, jersey barriers, longitudinal joints, precast panels, etc.
- Ideal for new construction and retrofit bridge preservation of old or failed joint Systems in concrete or rebuilt joint edges. Use in embedded metal angles where demolition or removal of the metal angles is not feasible and where existing joint opening is suited to the movement capability of BEJS.
- Ideal for lasting replacement of failed caulk joints.

### Features

**Watertight** – the tensionless silicone bellows are installed just below the deck surface. This ensures watertightness is achieved at the deck surface.

**Non-Invasive Anchoring** – there are no hard metal-to-concrete connections with the BEJS System. This includes embedded pins, anchors, screws, bolts or tracks, trays or rails. The System is locked to the joint faces by means of the backpressure of the foam; the epoxy adhesive; and the injected silicone sealant band at the joint face to foam and silicone bellows interface.

**Continuity of Seal** – as in all Emseal expansion joint Systems, continuity of seal through changes in plane and direction is an essential performance differentiator. “Universal 90s\*” Kickout Terminations” and “Custom Transitions” are factory fabricated transition pieces from Emseal that can be installed at inside corners and outside corners as needed and are warranted by Emseal to be watertight through the entire movement capability of the product. Alternatively, details for field-fabricated transitions from deck to wall, at curbs, sidewalks, parapets, tees, and crosses are available from Emseal.

### Movement Capability

+60% and -60% (Total 120%) of nominal material size.


### Aesthetics & Versatility

Standard color is black. Uniform bellows appearance, fuel resistance, and an enhanced ability to handle variations in joint size are among other System features.

### Performance


- Substrates must be parallel, plumb and capable of resisting approx. 2.5 psi backpressure from the foam.
- Standard sizes from 1/2” (12mm) to 4” (100mm). Other sizes available subject to review of application: consult Emseal.
- Fuel Resistance: Silicone sealant is not degraded by contact with fuel. Some swelling of the silicone material will normally occur, but it will return to its original shape upon evaporation of the fuel.

**Fig.1: BEJS System in Typical Installation — New or Retrofit**

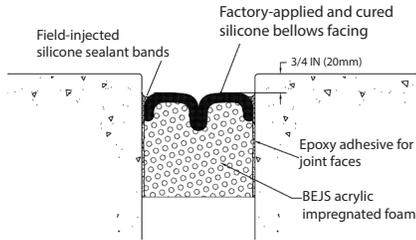


**Fig.2: BEJS-ON-A-REEL for Joints 1/2" (12mm) – 1 1/4" (30mm)**


Note: Material sizes less than 1 1/4" (30mm) are supplied on 12-LF long reels with a smooth, convex single bellows as shown.

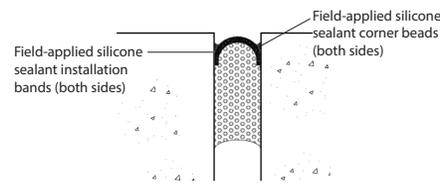


**Fig.3: BEJS System in Existing Steel Angles – Retrofit**

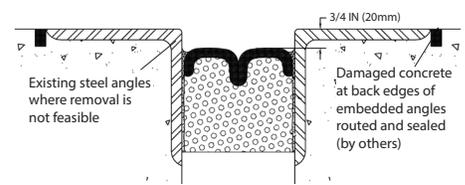

**Fig.4: BEJS System in Existing Strip-Seal Retrofit**

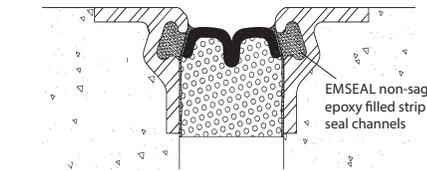

**Fig.5: BEJS System in New or Rebuilt Joint Edges with Nosing Material**

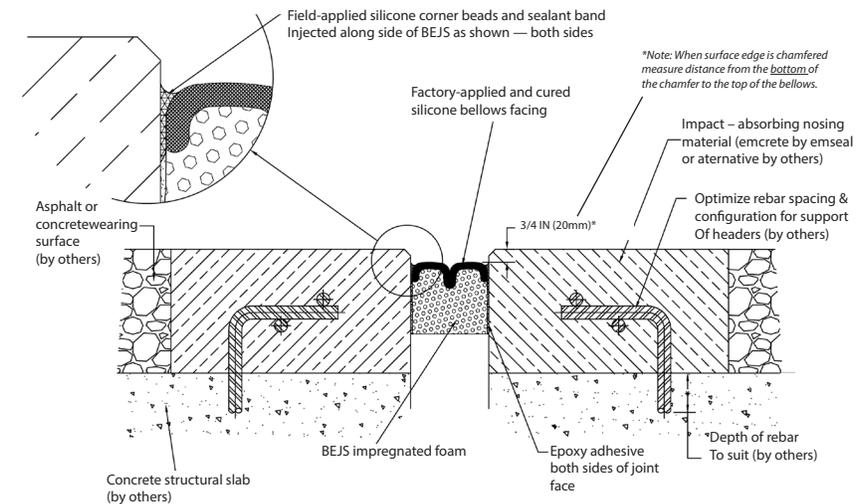

## Composition

- BEJS is produced by coating an impregnated cellular foam with highway-grade silicone.
- The silicone external facing is factory applied to the foam at a width greater than maximum joint extension and is cured before final compression.
- Silicone application and curing takes place in a factory-controlled environment. In contrast to field applied liquid sealant and backer rod installations, no movement takes place during curing that can cause deformation or stresses in the material.
- When compressed, a bellows is created in the coating. As joint movement occurs the bellows simply folds and unfolds free of tension on the bondline, and virtually free of tensile stresses in the silicone material.
- The foam provides a resilient backing to the silicone coating, making the System capable of resisting reasonable transient point loads.
- BEJS System is precompressed to less than the joint size for easy insertion. After removal from the shrink-wrap and hard board restraining packaging, it expands gradually.

## Installation

**IMPORTANT:** The following instructions are a summary. Refer to "BEJS System Install Data" and job-specific instructions of an Emseal technician for complete procedures.

- Store indoors at room temperature. Expansion is quicker when warm, slower when cold.
- Properly prepare substrates.
- Ensure material nominal size matches joint size.
- **Manufacturer recommended minimum installation temperature: 40° F and rising**
- Mix epoxy and trowel a thin layer onto the joint faces to at least the depth of the BEJS foam
- Apply a thin layer of epoxy to both sides of the joint face.
- Remove shrink-wrap packaging, hardboard. If necessary, heat using torch to expand material to a snug fit in the joint.
- Insert material into joint with a 3/4" (20mm) recess. For reels recess 1/2" (12mm).
- Join lengths by pushing silicone coated ends firmly together.
- Wipe silicone facing using clean, lint-free rag made damp with solvent.
- Before the epoxy cures, force the tip of the sealant tube between the foam and the substrate and inject a silicone sealant band. Tool overflow sealant into a cove bead between the top of the silicone bellows and the substrate. Tool silicone between joined lengths so that bellows is not restrained by excess silicone.



**Table 1: Typical Physical Properties of Preformed, Precompressed, Foam Supported Silicone Expansion Joint System**

*The base material is an odorless, clean handling, UV stable, non-staining polyurethane open cell foam with 100% acrylic, microsphere-modified, water based impregnation infused into the cellular foam base material. Continuity of seal can be achieved using field or factory fabricated transitions.*

Property	Value	Test Method
Thermal Movement	500 cycles at -60%, +60% Movement, Pass	ASTM E1399
Acrylic Impregnation	100%, Microsphere Modified, Water-based	
Base Material	Min 5.65 kg/m <sup>3</sup> Cellular, High Density, Polyurethane Foam	ASTM D3574
Density	Min. 6 lbs/cu ft	ASTM D545
Tensile Strength	Min. 18 psi	ASTM D3574
Elongation	Min. 150%	ASTM D3574
UV / Moisture Resistance	No Changes - 2000 hours, Pass	ASTM G155-00A
Compression Set	Max 3%	ASTM D3574
Temperature Service Range	-40°F to 185°F [-40°C to 85°C]	ASTM C711

**Note:** All testing conducted with a minimum silicone coating, at center line of the joint seal (between silicone coating bellows), of 1.5mm

**Table 2: Typical Physical Properties of Silicone Coating & Sealant Bands**

*The highway grade silicone coating is cured in a factory environment and installed in the field with the SAME fuel resistant, UV resistant, highway grade silicone. Continuity of seal is achieved using ONLY a single component to join and seal the Preformed Pre-Compressed, Silicone Coated, Self-Expanding Sealant System. When sized correctly silicone is NEVER in tension.*

Property	Value	Test Method
Single Component Coating	Sikasil® WS-295	Coatings, Joints, and Bands
Shore A Hardness	Min. 25	ASTM C661
Movement Capability	+50%, -50% (Total 100%)	ASTM C719
Tensile Strength	Min. 175psi	ASTM D412
Elongation at Break	Min. 600%	ASTM D412



**Table 4: BEJS SYSTEM Sizing**

(see "Performance" for movement capabilities & limitations)

Nominal Material Size (Joint Size at Mean T°F)	Depth of Seal	Min. Joint (closes to)	Max. Joint (opens to)
---	---------------	---------------------------	--------------------------

The following sizes are supplied on 12-LF (3.65 M) reels.  
See BEJS-ON-A-REEL information sheet.

1/2" (12mm)	1 3/4" (45mm)	1/4" (6mm)	3/4" (20mm)
3/4" (20mm)	1-3/4" (45mm)	5/16" (8mm)	1-1/4" (30mm)
1" (25mm)	1 3/4" (45mm)	3/8" (10mm)	1-1/2" (40mm)
1-1/4" (30mm)	1 3/4" (45mm)	1/2" (12mm)	2" (50mm)

The following sizes are supplied in shrink-wrapped sticks of 6.56 ft. (2M):

1-1/2" (40mm)	2-1/4" (55mm)	5/8" (16mm)	2-1/2" (65mm)
1-3/4" (45mm)	2-1/4" (55mm)	11/16" (18mm)	3" (75mm)
2" (50mm)	2-1/2" (65mm)	3/4" (20mm)	3 3/8" (80mm)
2-1/4" (55mm)	2-1/2" (65mm)	7/8" (22mm)	3-1/2" (90mm)
2-1/2" (65mm)	2-1/2" (65mm)	1" (25mm)	4" (100mm)
2-3/4" (70mm)	2-3/4" (70mm)	1-1/8" (28mm)	4-1/2" (115mm)
3" (75mm)	2-3/4" (70mm)	1-1/4" (30mm)	4-7/8" (120mm)
3-1/4" (85mm)	3-1/2" (90mm)	1-3/8" (34mm)	5-1/4" (135mm)
3-1/2" (90mm)	3-1/2" (90mm)	1-7/16" (36mm)	5-5/8" (140mm)
3-3/4" (95mm)	3-1/2" (90mm)	1-1/2" (40mm)	6" (150mm)
4" (100mm)	3-1/2" (90mm)	1-5/8" (43mm)	6-3/8" (160mm)

For joint sizes larger than 4-inches consult EMSEAL

Select nominal material size to correspond to joint-gap size at mean temperature.

## CAD & Guide Specs

Guide specifications and CAD details re available online at [Emseal.com](http://Emseal.com) or by [contacting Emseal](#).

## Warranty

Standard or project-specific warranties are available from Sika Emseal on request.

## Availability & Price

BEJS System is available for shipment internationally. Prices are available from local representatives and/or directly from the manufacturer. Sika Emseal reserves the right to modify or withdraw any product without prior notice.

**EMSEAL JOINT SYSTEMS, LTD**  
25 Bridle Lane  
Westborough, MA 01581 USA  
Phone: 508.836.0280  
Fax: 508.836.0281  
[www.emseal.com](http://www.emseal.com)

**EMSEAL, LLC**  
111 Royal Group Crescent  
Woodbridge, ON L4H 1X9 Canada  
Phone: +1-416-740-2090  
Fax: +1-416-740-0233  
[www.emseal.com](http://www.emseal.com)

**SIKA CORPORATION**  
201 Polito Avenue  
Lyndhurst, NJ 07071 USA  
Phone: +1-800-933-7452  
Fax: +1-2019336225  
[www.usa.sika.com](http://www.usa.sika.com)

**Product Data Sheet**  
Emseal BEJS System  
May 2022 Version SE-1.1



**BUILDING TRUST**

